




SERVICE SLANTS

YOUR QUESTIONS OR COMMENTS ON "SERVICE SLANTS" ARE WELCOME AT ANY TIME

ISSUED BY WURLITZER SERVICE DEPT., NORTH TONAWANDA, N. Y.

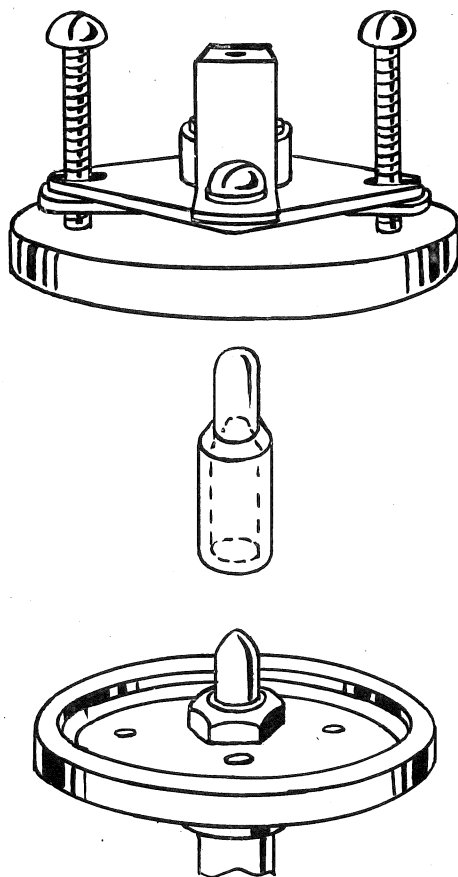

#54106 Alignment Tool

In the above sketch we have indicated the position and use of the subject alignment tool. Every Model 1250 should be checked with this tool when placed on location or after being moved from one location to another.

First, loosen the two screws holding the pressure pad assembly and place the alignment tool over the top point of the turntable shaft.

Second, raise the turntable and shaft assembly manually to playing position and with the pressure pad perfectly centered around the alignment tool, draw the two machine screws tight, lower the turntable and shaft assembly and remove the alignment tool.

This tool is available through your Wurlitzer distributor.

Also when installing new machines, there should be a thin film of oil on the turntable shaft when it is placed in operation.